STT116GKxxB

Thyristor-Thyristor Modules

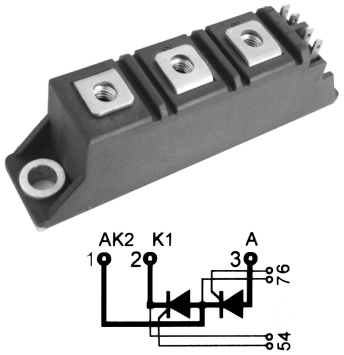

Type	V_{RSM} V_{DSM} V	V_{RRM} V_{DRM} V
STT116GK08B	900	800
STT116GK12B	1300	1200
STT116GK14B	1500	1400
STT116GK16B	1700	1600
STT116GK18B	1900	1800

Tolerance:±0.5mm
Dimensions in mm (1mm=0.0394")

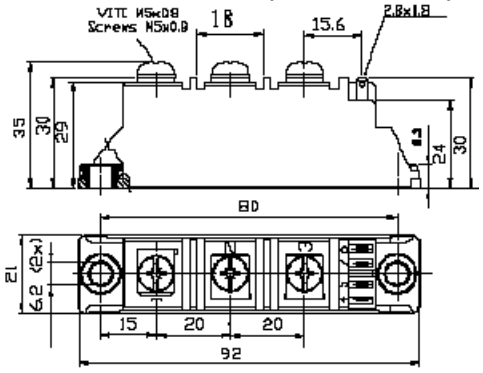

Symbol	Test Conditions		Maximum Ratings	Unit
I_{TRMS}, I_{FRMS} I_{TAVM}, I_{FAVM}	$T_{VJ}=T_{VJM}$ $T_C=85^oC$; 180° sine		180 116	A
I_{TSM}, I_{FSM}	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	2250 2400	A
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	2000 2150	
$\int i^2dt$	$T_{VJ}=45^oC$ $V_R=0$	t=10ms (50Hz), sine t=8.3ms (60Hz), sine	25300 23900	A^2s
	$T_{VJ}=T_{VJM}$ $V_R=0$	t=10ms(50Hz), sine t=8.3ms(60Hz), sine	20000 19100	
$(di/dt)_{cr}$	$T_{VJ}=T_{VJM}$ f=50Hz, t_p=200us $V_D=2/3V_{DRM}$ I_G=0.45A di_G/dt=0.45A/us	repetitive, $I_T=250A$ non repetitive, $I_T=I_{TAVM}$	150 500	A/us
$(dv/dt)_{cr}$	$T_{VJ}=T_{VJM}$; $V_{DR}=2/3V_{DRM}$ $R_{GK}=\infty$; method 1 (linear voltage rise)		1000	V/us
P_{GM}	$T_{VJ}=T_{VJM}$ $I_T=I_{TAVM}$	t_p=30us t_p=300us	10 5	W
P_{GAV}			0.5	W
V_{RGM}			10	V
T_{VJ} T_{VJM} T_{stg}			-40...+125 125 -40...+125	°C
V_{ISOL}	50/60Hz, RMS $I_{ISOL}\leq$1mA	t=1min t=1s	3000 3600	V~
M_d	Mounting torque (M5) Terminal connection torque (M5)		2.5-4.0/22-35 2.5-4.0/22-35	Nm/lb.in.
Weight	Typ.		110	g

Tel.: +7 (495) 772-38-58
Tel/Fax: +7 (495) 662-63-75
e-mail: s-elec@mail.ru
www.s-elec.ru

STT116GKxxB

Thyristor-Thyristor Modules

Symbol	Test Conditions	Characteristic Values	Unit
I_{RRM}, I_{DRM}	$T_{VJ}=T_{VJM}$; $V_R=V_{RRM}$; $V_D=V_{DRM}$	5	mA
V_{TM}	I_{TM}=348A; T_{VJ}=25°C	1.65	V
V_{TO}	For power-loss calculations only (T_{VJ}=125°C)	0.8	V
r_T		2.4	mΩ
V_{GT}	V_D=6V; T_{VJ}=25°C T_{VJ}=-40°C	2.5 2.6	V
I_{GT}	V_D=6V; T_{VJ}=25°C T_{VJ}=-40°C	150 200	mA
V_{GD}	$T_{VJ}=T_{VJM}$; $V_D=2/3V_{DRM}$	0.2	V
I_{GD}		10	mA
I_L	T_{VJ}=25°C; t_p=10us; V_D=6V I_G=0.45A; di_G/dt=0.45A/us	450	mA
I_H	T_{VJ}=25°C; V_D=6V; R_{GK}=∞	200	mA
t_{gd}	T_{VJ}=25°C; $V_D=1/2V_{DRM}$ I_G=0.45A; di_G/dt=0.45A/us	2	us
t_q	$T_{VJ}=T_{VJM}$; I_T=150A; t_p=200us; -di/dt=10A/us typ. V_R=100V; dv/dt=20V/us; $V_D=2/3V_{DRM}$	185	us
Q_S	$T_{VJ}=T_{VJM}$; I_T, I_F=50A; -di/dt=6A/us	170	uC
I_{RM}		45	A
R_{thJC}	per thyristor/diode; DC current per module	0.22 0.11	K/W
R_{thJK}	per thyristor/diode; DC current per module	0.42 0.21	K/W
ds	Creeping distance on surface	12.7	mm
d_A	Strike distance through air	9.6	mm
a	Maximum allowable acceleration	50	m/s^2

FEATURES

* International standard package
* Copper base plate
* Glass passivated chips
* Isolation voltage 3600 V~
* UL file NO.310749
* RoHs compliant

APPLICATIONS

* DC motor control
* Softstart AC motor controller
* Light, heat and temperature control

ADVANTAGES

* Space and weight savings
* Simple mounting with two screws
* Improved temperature and power cycling
* Reduced protection circuits

Tel.: +7 (495) 772-38-58
Tel/Fax: +7 (495) 662-63-75
e-mail: s-elec@mail.ru
www.s-elec.ru

STT116GKxxB

Thyristor-Thyristor Modules

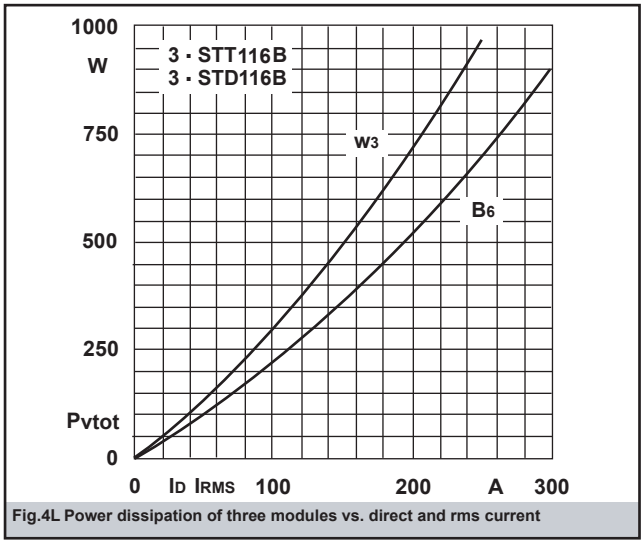

Fig.4L Power dissipation of three modules vs. direct and rms current

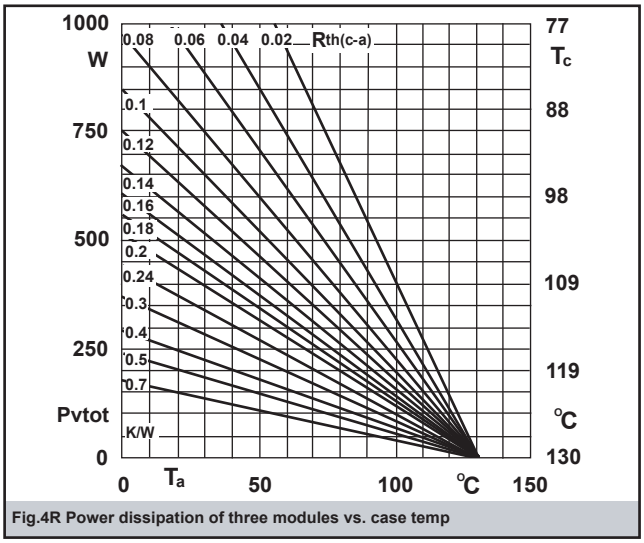

Fig.4R Power dissipation of three modules vs. case temp

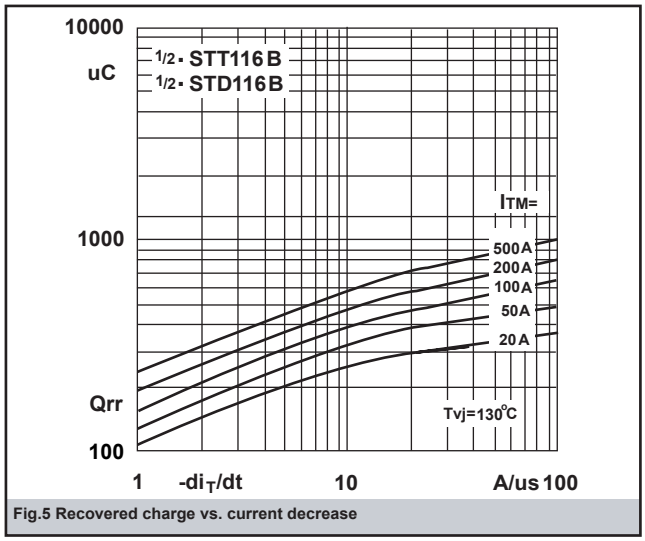

Fig.5 Recovered charge vs. current decrease

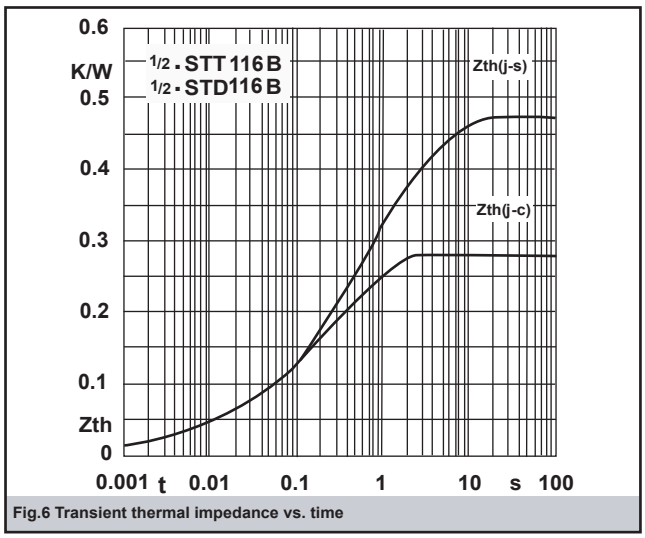

Fig.6 Transient thermal impedance vs. time

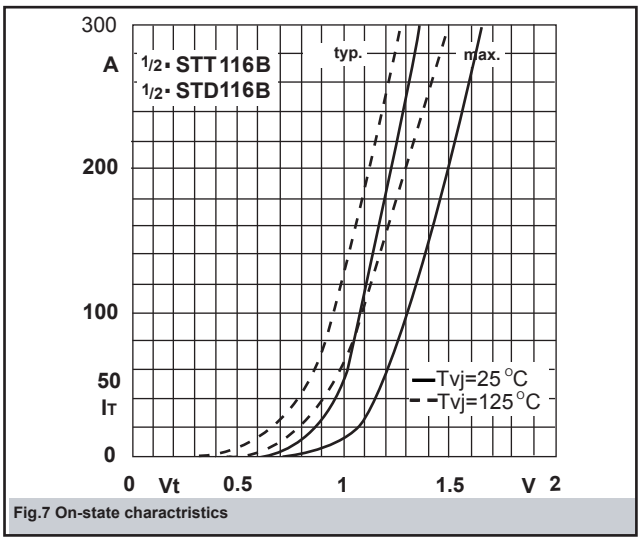

Fig.7 On-state charactristics

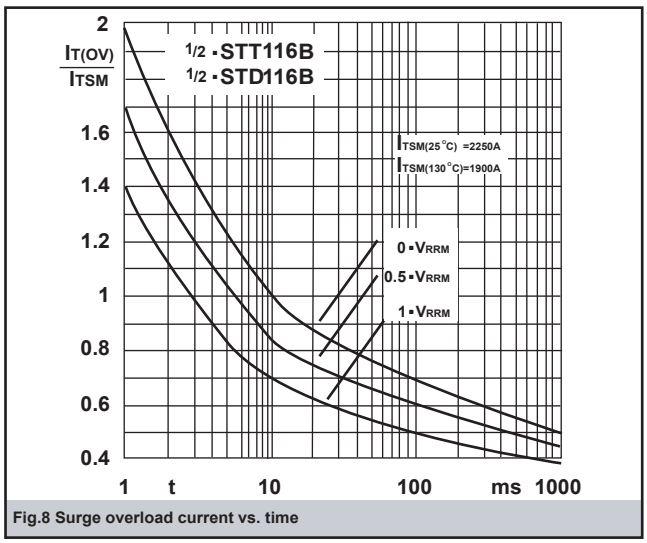

Fig.8 Surge overload current vs. time

Tel.: +7 (495) 772-38-58
Tel/Fax: +7 (495) 662-63-75
e-mail: s-elec@mail.ru
www.s-elec.ru